



ÖZEL TRİGER KASNAKLAR / SPECIAL TIMING BELT PULLEYS



BAT 10 (10 mm) ADIMLI PİLOT YAY TRİGER DİŞLİLER BAT 10 (10 mm) PITCH PILOT BORE CURVED TOOTH TIMING BELT PULLEYS

- BAT 10 B25 (25 mm KAYIŞ ENİ / BELT WIDTH)
- BAT 10 B32 (32 mm KAYIŞ ENİ / BELT WIDTH)
- BAT 10 B50 (50 mm KAYIŞ ENİ / BELT WIDTH)
- BAT 10 B75 (75 mm KAYIŞ ENİ / BELT WIDTH)
- BAT 10 B100 (100 mm KAYIŞ ENİ / BELT WIDTH)



BAT 10 (10 mm) ADIMLI BURÇLU YAY TRİGER DİŞLİLER BAT 10 (10 mm) PITCH CURVED TOOTH TIMING BELT PULLEYS FOR TAPER BUSHES

- BAT 10 B25 (25 mm KAYIŞ ENİ / BELT WIDTH)
- BAT 10 B32 (32 mm KAYIŞ ENİ / BELT WIDTH)
- BAT 10 B50 (50 mm KAYIŞ ENİ / BELT WIDTH)
- BAT 10 B75 (75 mm KAYIŞ ENİ / BELT WIDTH)
- BAT 10 B100 (100 mm KAYIŞ ENİ / BELT WIDTH)



KARTAL TRİGER DİŞLİLER EAGLE TYPE TIMING BELT PULLEYS

- 8E (8 mm) ADIMLI KARTAL TRİGER DİŞLİLER
- 8E (8 mm) PITCH EAGLE TYPE TIMING BELT PULLEYS

• Y TİP - Y TYPE • W TİP - W TYPE • P TİP - P TYPE


- 14E (14 mm) ADIMLI KARTAL TRİGER DİŞLİLER
- 14E (14 mm) PITCH EAGLE TYPE TIMING BELT PULLEYS

• B TİP - B TYPE • G TİP - G TYPE • Q TİP - Q TYPE • R TİP - R TYPE

BAT 10 (10 mm) ADIMLI PİLOT YAY TRİGER DİŞLİLER BAT 10 (10 mm) TYPE PILOT BORE CURVED TOOTH TIMING BELT PULLEYS

BAT 10 B25 - MATERIAL: ALUMINIUM

KOD CODE	d mm	Z	Dp mm	F mm	L mm	Dm mm
20 - BAT 10 - B25	12	20	63,66	30	40	46
22 - BAT 10 - B25	12	22	70,03	30	40	53
24 - BAT 10 - B25	12	24	76,40	30	40	57
25 - BAT 10 - B25	12	25	79,58	30	40	59
27 - BAT 10 - B25	12	27	85,95	30	40	64
30 - BAT 10 - B25	12	30	95,50	30	40	73
32 - BAT 10 - B25	12	32	101,86	30	40	80
36 - BAT 10 - B25	16	36	114,59	30	40	92
40 - BAT 10 - B25	16	40	127,33	30	40	105
48 - BAT 10 - B25	20	48	152,79	30	40	130
60 - BAT 10 - B25	20	60	190,99	30	40	160

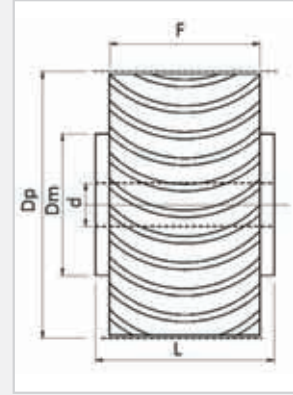

MALZEME : ALUMİNYUM.
 MATERIAL : ALUMINIUM.

BAT 10 B32 - MATERIAL: ALUMINIUM

KOD CODE	d mm	Z	Dp mm	F mm	L mm	Dm mm
20 - BAT 10 - B32	12	20	63,66	37	47	46
22 - BAT 10 - B32	12	22	70,03	37	47	53
24 - BAT 10 - B32	12	24	76,40	37	47	57
25 - BAT 10 - B32	12	25	79,58	37	47	59
27 - BAT 10 - B32	12	27	85,95	37	47	64
30 - BAT 10 - B32	12	30	95,50	37	47	73
32 - BAT 10 - B32	12	32	101,86	37	47	80
36 - BAT 10 - B32	16	36	114,59	37	47	92
40 - BAT 10 - B32	16	40	127,33	37	47	105
48 - BAT 10 - B32	20	48	152,79	37	47	130
60 - BAT 10 - B32	20	60	190,99	37	47	160

BAT 10 B75 - MATERIAL: ALUMINIUM

KOD CODE	d mm	Z	Dp mm	F mm	L mm	Dm mm
20 - BAT 10 - B75	12	20	63,66	80	90	46
22 - BAT 10 - B75	12	22	70,03	80	90	53
24 - BAT 10 - B75	12	24	76,40	80	90	57
25 - BAT 10 - B75	12	25	79,58	80	90	59
27 - BAT 10 - B75	12	27	85,95	80	90	64
30 - BAT 10 - B75	12	30	95,50	80	90	73
32 - BAT 10 - B75	12	32	101,86	80	90	80
36 - BAT 10 - B75	16	36	114,59	80	90	92
40 - BAT 10 - B75	16	40	127,33	80	90	105
48 - BAT 10 - B75	20	48	152,79	80	90	130
60 - BAT 10 - B75	20	60	190,99	80	90	160

BAT 10 B50 - MATERIAL: ALUMINIUM

KOD CODE	d mm	Z	Dp mm	F mm	L mm	Dm mm
20 - BAT 10 - B50	12	20	63,66	55	65	46
22 - BAT 10 - B50	12	22	70,03	55	65	53
24 - BAT 10 - B50	12	24	76,40	55	65	57
25 - BAT 10 - B50	12	25	79,58	55	65	59
27 - BAT 10 - B50	12	27	85,95	55	65	64
30 - BAT 10 - B50	12	30	95,50	55	65	73
32 - BAT 10 - B50	12	32	101,86	55	65	80
36 - BAT 10 - B50	16	36	114,59	55	65	92
40 - BAT 10 - B50	16	40	127,33	55	65	105
48 - BAT 10 - B50	20	48	152,79	55	65	130
60 - BAT 10 - B50	20	60	190,99	55	65	160

BAT 10 B100 - MATERIAL: ALUMINIUM

KOD CODE	d mm	Z	Dp mm	F mm	L mm	Dm mm
20 - BAT 10 - B100	12	20	63,66	105	115	46
22 - BAT 10 - B100	12	22	70,03	105	115	53
24 - BAT 10 - B100	12	24	76,40	105	115	57
25 - BAT 10 - B100	12	25	79,58	105	115	59
27 - BAT 10 - B100	12	27	85,95	105	115	64
30 - BAT 10 - B100	12	30	95,50	105	115	73
32 - BAT 10 - B100	12	32	101,86	105	115	80
36 - BAT 10 - B100	16	36	114,59	105	115	92
40 - BAT 10 - B100	16	40	127,33	105	115	105
48 - BAT 10 - B100	20	48	152,79	105	115	130
60 - BAT 10 - B100	20	60	190,99	105	115	160

ÖZELLİKLER:

Kavisli diş profilleri sayesinde;

- Standart triger kayışlara göre daha sessizdirler.
- Yüksek hassasiyette hareketi iletirler.
- Dişe gelen kesme kuvveti daha düşük olduğu için kayış ömrü daha uzundur.
- Flanşa ihtiyaç duymazlar.

SPECIFICATIONS:

Due to its curved tooth structure:


- They are more silent than conventional timing belt pulleys.
- They provide very high transmission accuracy.
- Due to the lower shear force, their belt life is longer.
- They do not need flanges.



BAT 10 (10 mm) ADIMLI BURÇLU YAY TRİGER DİŞLİLER BAT 10 (10 mm) TYPE CURVED TOOTH TIMING BELT PULLEYS FOR TAPER BUSHES

BAT 10 B25 - MATERIAL: ALUMINIUM

KOD CODE	BUÇR TAPER BUSH	MAX. DELİK MAX. DIAMETER mm	Z	Dp mm	S mm	R mm	Di mm
B20 - BAT 10 - B25	1108	28	20	63,66	30	4	46
B22 - BAT 10 - B25	1108	28	22	70,03	30	4	53
B24 - BAT 10 - B25	1108	28	24	76,40	30	4	57
B25 - BAT 10 - B25	1610	42	25	79,58	30	2,5	59
B27 - BAT 10 - B25	1610	42	27	85,95	30	2,5	64
B30 - BAT 10 - B25	1610	42	30	95,50	30	2,5	73
B32 - BAT 10 - B25	1610	42	32	101,86	30	2,5	80
B36 - BAT 10 - B25	2012	50	36	114,59	30	-	92
B40 - BAT 10 - B25	2012	50	40	127,33	30	-	105
B48 - BAT 10 - B25	2012	50	48	152,79	30	-	130
B60 - BAT 10 - B25	2012	50	60	190,99	30	-	160

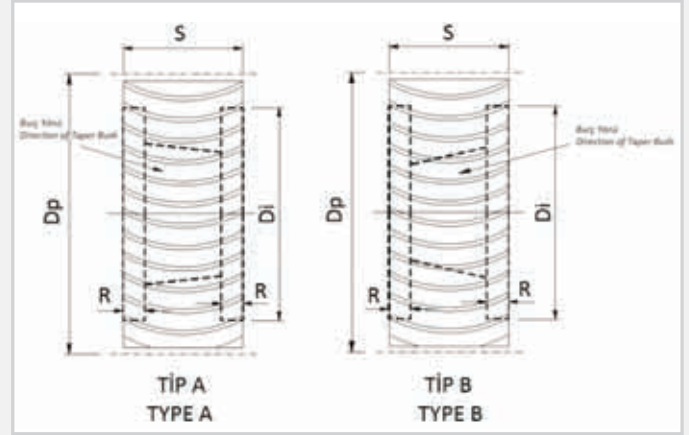

MALZEME : ALUMİNYUM.
MATERIAL : ALUMINIUM.

BAT 10 B32 - MATERIAL: ALUMINIUM

KOD CODE	BUÇR TAPER BUSH	MAX. DELİK MAX. DIAMETER mm	Z	Dp mm	S mm	R mm	Di mm
B20 - BAT 10 - B32	1108	28	20	63,66	37	7,5	46
B22 - BAT 10 - B32	1210	32	22	70,03	37	6	53
B24 - BAT 10 - B32	1610	42	24	76,40	37	6	57
B25 - BAT 10 - B32	1610	42	25	79,58	37	6	59
B27 - BAT 10 - B32	1610	42	27	85,95	37	6	64
B30 - BAT 10 - B32	1610	42	30	95,50	37	6	73
B32 - BAT 10 - B32	1610	42	32	101,86	37	6	80
B36 - BAT 10 - B32	2012	50	36	114,59	37	2,5	92
B40 - BAT 10 - B32	2012	50	40	127,33	37	2,5	105
B48 - BAT 10 - B32	2012	50	48	152,79	37	2,5	130
B60 - BAT 10 - B32	2012	50	60	190,99	37	2,5	160

BAT 10 B75 - MATERIAL: ALUMINIUM

KOD CODE	BUÇR TAPER BUSH	MAX. DELİK MAX. DIAMETER mm	Z	Dp mm	S mm	R mm	Di mm
B27 - BAT 10 - B75	1615	42	27	85,95	80	21	64
B30 - BAT 10 - B75	1615	42	30	95,50	80	21	73
B32 - BAT 10 - B75	2012	50	32	101,86	80	24	80
B36 - BAT 10 - B75	2012	50	36	114,59	80	24	92
B40 - BAT 10 - B75	2517	50	40	127,33	80	17,5	105
B48 - BAT 10 - B75	2517	50	48	152,79	80	17,5	130
B60 - BAT 10 - B75	3020	75	60	190,99	80	15	160

BAT 10 B50 - MATERIAL: ALUMINIUM

KOD CODE	BUÇR TAPER BUSH	MAX. DELİK MAX. DIAMETER mm	Z	Dp mm	S mm	R mm	Di mm
B22 - BAT 10 - B50	1210	32	22	70,03	55	15	53
B24 - BAT 10 - B50	1615	42	24	76,40	55	8,5	57
B25 - BAT 10 - B50	1615	42	25	79,58	55	8,5	59
B27 - BAT 10 - B50	1615	42	27	85,95	55	8,5	64
B30 - BAT 10 - B50	1615	42	30	95,50	55	8,5	73
B32 - BAT 10 - B50	2012	50	32	101,86	55	11,5	80
B36 - BAT 10 - B50	2012	50	36	114,59	55	11,5	92
B40 - BAT 10 - B50	2012	50	40	127,33	55	11,5	105
B48 - BAT 10 - B50	2517	60	48	152,79	55	5	130
B60 - BAT 10 - B50	2517	60	60	190,99	55	5	160

BAT 10 B100 - MATERIAL: ALUMINIUM

KOD CODE	BUÇR TAPER BUSH	MAX. DELİK MAX. DIAMETER mm	Z	Dp mm	S mm	R mm	Di mm
B27 - BAT 10 - B100	1615	42	27	85,95	105	33,5	64
B30 - BAT 10 - B100	1615	42	30	95,50	105	33,5	73
B32 - BAT 10 - B100	2012	50	32	101,86	105	36,5	80
B36 - BAT 10 - B100	2012	50	36	114,59	105	36,5	92
B40 - BAT 10 - B100	2517	50	40	127,33	105	30	105
B48 - BAT 10 - B100	2517	50	48	152,79	105	30	130
B60 - BAT 10 - B100	3020	75	60	190,99	105	27	160

ÖZELLİKLER:

Kavisli diş profilleri sayesinde;

- Standart triger kayışlara göre daha sessizdirler.
- Yüksek hassasiyette hareketi iletilirler.
- Dişe gelen kesme kuvveti daha düşük olduğu için kayış ömrü daha uzundur.
- Flanşa ihtiyaç duymazlar.

SPECIFICATIONS:

Due to its curved tooth structure:

- They are more silent than conventional timing belt pulleys.
- They provide very high transmission accuracy.
- Due to the lower shear force, their belt life is longer.
- They do not need flanges.