



MALZEME : ÇELİK.
MATERIAL : STEEL

ÖZELLİKLERİ:

1. Amacı hareket iletmek değil sabit bir boru ile bir dirseğin veya başka bir borunun birleşmesinde kullanılır.
2. Sızdırmazlık özelliğine sahiptir. Bu sebeple genelde sıvı, gaz veya küçük parçacıkların boru içerisinde taşınmasında kullanılır.

KULLANILIŞI:



1. Boru kaplinin iki flanşı birleştirilecek olan iki boru veya dirseğe kaynak edilir.
2. Daha sonra kelepçe, açık bir şekilde iki flanşın üzerine yerleştirilir.
3. En son olarak kelepçe kapatılır ve sıkılır. Böylece 2 boru sızdırmaz bir şekilde birleşmiş olur.

SPECIFICATIONS:

1. Unlike other couplings, the pipe couplings are not used to transmit motion. They only compound two pipes or elbow shaped pipes.
2. Due to their impermeability feature, they are used the pipes which transfers fluids, gases or small particles.

USAGE:

1. Two flanges of the coupling are welded to two pipes or elbow shaped pipes.
2. Then, connector is placed on to the flanges.
3. Finally, the end of the connector is closed and tightened. Therefore, 2 pipes are mounted while quaranteeing impermeability.

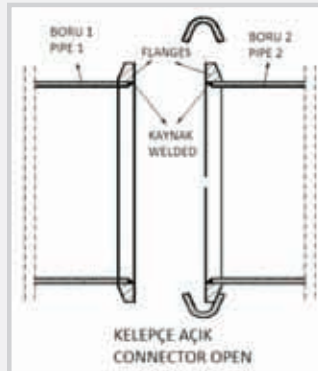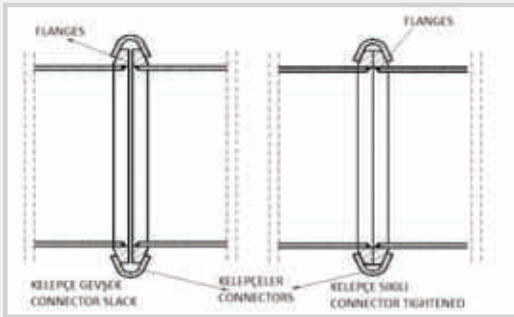

KOD CODE	Do mm	D mm	Da mm	B mm	D mm
PC 80	80	110	120	10	25
PC 120	118	144	155	10	25
PC 178	175	198	210	10	25
PC 224	218	244	260	10	25